



Sprinter P6V2030 data sheet



Drawing:

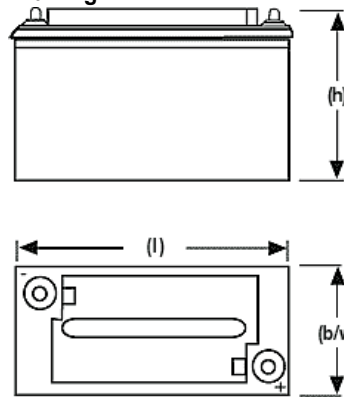

Terminal:



Specifications:

Exide type designation	Part number	Nom. Voltage V	Nominal capacity C ₁₀ 1.80Vpc 25°C Ah	Power 15min 1.60 Vpc 25°C W	Length l max. mm	Width b/w max. mm	Height h1 max. mm	Weight approx. kg	Internal resistance mOhm	Short circuit current A	Max. perm current 5 secs. A	Terminal
P6V2030	NAPW062030HP0MA	6	178	2030	359.0	172.0	226.0	32.50	1.7	3770	2000	M-M8

Part numbers not valid for North America, use type for ordering!

Constant-current discharge in A (@ 25 °C):

Part number	Exide type designation	VpC	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	5h	8h	10h	20h
NAPW062030HP0MA	P6V2030	1.95	226.0	224.0	204.0	179.0	161.0	132.0	101.5	83.2	47.9	35.5	23.3	15.8	13.3	7.0
NAPW062030HP0MA	P6V2030	1.90	345.0	325.0	272.0	227.0	198.0	154.0	120.0	97.4	58.4	42.6	28.4	18.9	16.0	8.4
NAPW062030HP0MA	P6V2030	1.85	462.0	422.0	339.0	275.0	232.0	176.0	133.0	108.6	63.9	48.0	31.7	20.6	17.0	8.9
NAPW062030HP0MA	P6V2030	1.80	561.0	497.0	386.0	310.0	255.0	192.0	141.0	115.7	69.3	52.1	33.3	21.6	17.8	9.4
NAPW062030HP0MA	P6V2030	1.75	647.0	563.0	424.0	334.0	272.0	199.0	146.2	118.8	71.1	53.6	34.1	22.1	18.3	9.6
NAPW062030HP0MA	P6V2030	1.70	713.0	616.0	453.0	350.0	282.0	206.0	151.2	120.8	72.1	54.4	34.7	22.4	18.6	9.8
NAPW062030HP0MA	P6V2030	1.65	771.0	655.0	469.0	360.0	291.0	211.1	153.3	121.8	72.6	54.9	34.8	22.5	18.7	9.9
NAPW062030HP0MA	P6V2030	1.60	801.0	680.0	481.0	369.0	296.0	215.2	155.3	122.8	72.9	55.1	34.8	22.5	18.7	9.9

Constant-power discharge in W/block (@ 25 °C):

Part number	Exide type designation	VpC	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	5h	8h	10h
NAPW062030HP0MA	P6V2030	1.90	2008	1881	1573	1329	1150	918.6	717.6	590.7	348.1	253.8	169.5	112.7	94.4
NAPW062030HP0MA	P6V2030	1.85	2596	2375	1931	1583	1340	1034	791.7	643.5	383.7	285.2	185.7	121.8	101.5
NAPW062030HP0MA	P6V2030	1.80	3082	2807	2185	1773	1477	1118	834.3	678.0	408.0	306.5	194.9	126.9	105.6
NAPW062030HP0MA	P6V2030	1.75	3472	3092	2385	1900	1562	1161	860.7	693.2	416.2	312.6	200.0	128.9	107.6
NAPW062030HP0MA	P6V2030	1.70	3790	3325	2512	1962	1614	1192	875.9	701.4	419.2	314.7	202.0	130.9	108.6
NAPW062030HP0MA	P6V2030	1.65	4010	3483	2576	2005	1636	1206	882.0	705.4	421.2	315.7	203.0	130.9	108.6
NAPW062030HP0MA	P6V2030	1.60	4126	3578	2617	2030	1646	1213	887.1	707.5	422.2	316.7	203.0	130.9	108.6